



Schedule For Public Meeting:

August 7, 1989, 7 p.m.
Wexford County Courthouse
Circuit Court Room
437 E. Division
Cadillac, Michigan

Public Comment Period:

July 27 through August 28, 1989

EPA Region 5 Records Ctr.



234891



Printed on recycled paper

United States
Environmental Protection
Agency


Office of Public Affairs
Region 5
230 South Dearborn Street
Chicago, Illinois 60604

Illinois Indiana
Michigan Minnesota
Ohio Wisconsin



Kysor of Cadillac, Inc. and Northernnaire Plating Company Cadillac, Michigan Cleanup Action Recommended

July 1989

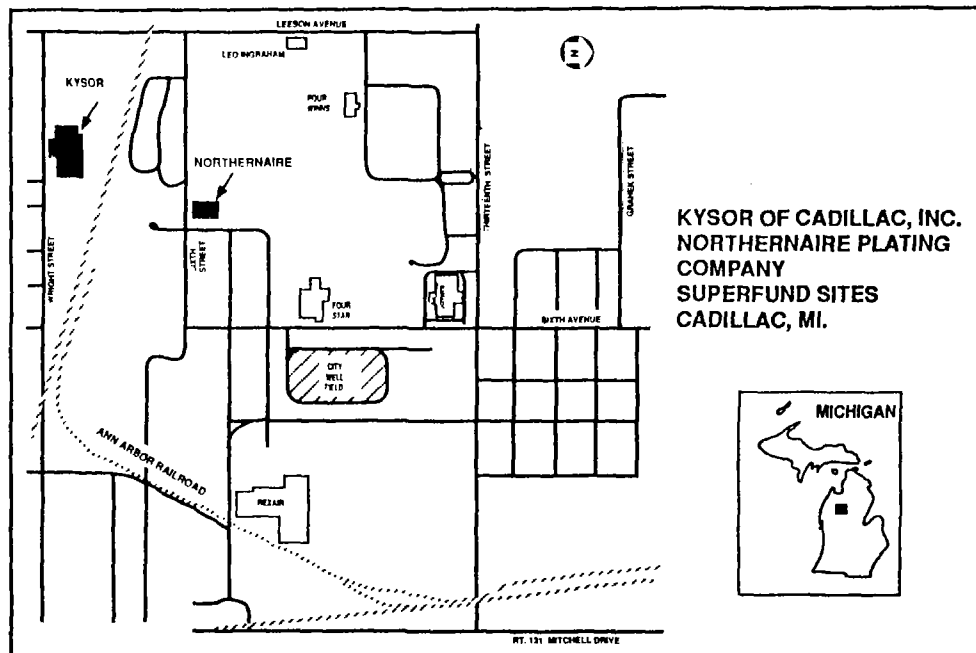

INTRODUCTION

The Michigan Department of Natural Resources (MDNR), in cooperation with the United States Environmental Protection Agency (EPA), recently completed an evaluation of remedial alternatives for containing and treating contamination sources at the Cadillac Industrial Park in Cadillac, Michigan. The Cadillac Industrial Park consists of nearly 40 industrial facilities, two of which have been designated as **Superfund** sites: the Northernnaire Plating Company (Northernnaire), and the Kysor of Cadillac, Inc. (Kysor) sites. Based on this evaluation, EPA and MDNR have identified a preferred remedial alternative for both sites.

The Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) requires publication of a Proposed Plan for all Superfund sites. The Proposed Plan provides background

on the sites, gives a brief summary of the **Remedial Investigation/Feasibility Study (RI/FS)**, describes the alternatives being considered to control contamination at the sites, and presents the rationale for EPA and MDNR's recommendation of a preferred alternative. This plan is made available to the public and comments on the recommended action as well as all the alternatives under consideration are encouraged. These comments will assist EPA in its final choice of a cleanup action plan for the sites.

The RI/FS report, the complete Proposed Plan, as well as other site documents, are located at the Cadillac-Wexford County Library and should be consulted for a more complete description of site conditions and all the alternatives being considered. A glossary of terms used in this fact sheet is presented on page 7. Words and phrases defined in the glossary appear in bold print on first reference.

SITE DESCRIPTION AND BACKGROUND

The Northernnaire Plating Company, which operated from 1971 to 1981, is located at the corner of Sixth Street and Eighth Avenue in the Cadillac Industrial Park. A small residential area is located about one-eighth mile southwest of the site. The site is approximately one-quarter mile southwest of the well field that is the sole source of water for the city of Cadillac water system.

In 1978, several private wells within the city of Cadillac were tested for contamination by MDNR following citizen complaints about water quality. Two private wells were found to contain high levels of **chromium**. The MDNR investigated the Northernnaire site and identified several suspected sources of soil and **ground-water** contamination: the private sewer line serving Northernnaire, the sewer manholes, and improperly stored wastes and spills on the ground near the building. The city of Cadillac revoked Northernnaire's sewer discharge permit and cut off its sewer connection in 1978. After this, Northernnaire stored its wastes on site and removed them by truck. City water was provided to the two residences with contaminated wells.

The Northernnaire site was proposed for listing on the **National Priorities List (NPL)** in 1982, and in 1983, EPA removed a number of wastes, including acids and cyanide wastes, stored on site in drums and gallon containers. EPA also removed a 120-foot length of private sewer line from the plant and steam cleaned the building.

The Kysor facility, located on Wright Street on the southern edge of the Industrial Park, manufactures truck parts. In the past, Kysor disposed spent solvent used in its operations directly on the soils behind the plant. In 1980 and 1983, a series of wells was installed on the Kysor property. Ground-water samples taken from these wells in 1983 indicated there were levels of **Volatile Organic Compounds (VOCs)** in the ground water that were above health-based standards. In 1981, Kysor excavated soils down to depths of six feet in two areas of heavy contamination, removing approximately 700 cubic yards of soils. These exca-

vations were backfilled with clean material, thus eliminating the risk of anyone being directly exposed to the contaminated soils. However, further testing by MDNR showed that the soils were still heavily contaminated with VOCs, and the site was proposed for inclusion on the NPL in 1985.

RESULTS OF REMEDIAL INVESTIGATIONS

Remedial investigations were conducted separately for both sites. The RIs indicated that the ground-water plumes combine, or co-mingle, so that the ground water under both sites is contaminated with elements from Northernnaire and Kysor. Therefore, these sites are being combined in the Proposed Plan and will have a single cleanup action. When the final remedial action is selected, it will address the soil contamination at the Kysor site and the ground-water contamination from both sites.

Past fact sheets written by MDNR have reported the results of the remedial investigations and activities at the sites. For a full understanding interested parties may consult the RI/FS reports in the site repository. This fact sheet will contain only a summary of the agencies' actions to date.

In 1985, MDNR completed an RI at the Northernnaire site, which indicated contamination in the surface and subsurface soils around the Northernnaire building and in the sewer line sediments. The investigation also showed that the ground water was contaminated with chromium at depths of 150 feet. Because the contaminated soils on-site were an ongoing source of contamination to the ground water, it was decided that it was appropriate to first do a cleanup of the soil contamination and a ROD was signed in September 1985 for this phase of the cleanup. The design work for the cleanup was completed in 1987, and this phase of the cleanup should be finished later this year.

The Kysor investigation indicated that high levels of VOC contamination still exist in the soils on-site. Also during this time it was determined that VOC-contaminated ground water from the Kysor facility was intermingled with chromium-contaminated ground water

coming from the Northernnaire plant, thus prompting the agencies' decision to combine both sites into one cleanup effort.

GOALS OF THE PLANNED CLEANUP

As part of the investigation, MDNR conducted a Risk Assessment, which is a study to determine the current and potential effects on human health and the environment from the contamination identified for the sites. The Risk Assessment determined that the contaminated soils at Kysor are not an immediate threat, since clean fill was placed over the excavations of highest contamination, and there is no likelihood of human contact with the contaminated soils. However, this contamination has migrated to the ground water and will continue to be a source until the soils are cleaned.

The ground-water plumes from the two sites co-mingle, and thus the ground water is contaminated with both VOCs and chromium and must be cleaned. Currently, the depths to which the ground-water table is contaminated are above those that are drawn from for the city water supply wells. However, this contamination, if left unaddressed, may move through the lower water tables and reach the city wells. Also, since the contaminated ground water has traveled off-site to areas that may be developed in the future for residential use, without corrective action, residential wells that might be installed would be exposed to the contamination.

Thus, MDNR and EPA have established the following corrective action goals:

- To eliminate the ongoing source of ground-water contamination from the VOC-contaminated soils on the Kysor property.
- To treat the co-mingled plumes of contaminated ground water to prevent further spreading and possible contamination of city water supply wells.

To accomplish this, alternative technologies for both parts of the cleanup have been defined and screened to determine the best possible alternatives.

EPA'S NINE EVALUATION CRITERIA

Overall Protectiveness A measure of how well a proposed alternative reduces the current and future threats to human health and the environment identified during the RI.

Compliance with Applicable or Relevant and Appropriate Requirements (ARARs) Addresses how the proposed alternative complies with pertinent federal and state regulations. This criterion also considers how an alternative complies with advisories or other guidelines that do not have the status of laws, but that EPA and the State have agreed to follow.

Long-term Effectiveness A measure of the long-term effectiveness of an

alternative in protecting human health and the environment long after the design objectives have been met.

Reduction of Toxicity, Mobility, or Volume Addresses the technical performances of treatment technologies used under a proposed alternative.

Short-term Effectiveness A measure of the effectiveness of an alternative in protecting human health and the environment during construction and implementation.

Implementability Addresses the technical and administrative feasibility of alternatives, including the

availability of goods and services needed to implement the alternative.

Cost Addresses the capital and operation and maintenance costs of an alternative.

Acceptance by the State Addresses the preferences or concerns of the affected state agencies regarding proposed alternatives and ARARs or waivers.

Community Acceptance Considers community preference of concerns about alternatives. This will be addressed in the Record of Decision following a review of public comments.

The following is a listing of the alternatives to correct contamination in the soils and ground water, and a brief description of the process involved and the costs of each alternative.

CLEANUP ALTERNATIVES

Ground-Water Contamination Alternatives

Because the ground water is contaminated with two different contaminants, the cleanup will consist of two separate treatments for the VOC and the chromium. However, both of these treatments

will be accomplished in the same facility. Regardless of the action that is finally chosen for this cleanup, the following elements are common to each of the three alternatives for the ground-water contamination except the "No Action" alternative:

A ground-water extraction system consisting of pumping wells will be constructed to extract the ground water in the shallow and intermediate aquifers. These wells will intercept the contaminated ground water and transport it by means of an underground piping system to the treatment facility on-site.

One of two options for treating the chromium in the ground water will be used for all alternatives. These are 1) Ion Exchange, whereby the chromium is precipitated out of the

water by means of a chemical process, at an estimated cost of \$1,248,000. The second option is 2) Carbon Adsorption. The water will be passed through an activated carbon filtering system, which binds the chromium molecules to the carbon, thus removing it from the water. This process has the same implementation time as the first option and is estimated to cost \$504,000.

After the ground water is treated, it will be tested to ensure that it meets or exceeds health-based standards and then will be discharged to the Clam River. This will require constructing a piping system to carry the treated water to the river and acquiring the necessary permits.

There will be ongoing monitoring during the cleanup of the ground water from approximately 30 of the existing monitoring wells to determine the effectiveness of the extraction system and movement of the contaminated plumes.

The specific ground-water alternatives are as follows:

Ground-Water Alternative 1 - No Action

A "No Action" alternative must be examined on each Superfund site. Under this alternative, no cleanup would be enacted and the ground water would simply be monitored. The associated estimated cost is to conduct the monitoring, seek property

deed restrictions, and conduct future reviews as necessary.

Estimated Time to Implement: None
Estimated Cost: \$824,000

Ground-Water Alternative 2 - Extraction, Chromium Treatment, Ultraviolet/Oxidation and Discharge

This alternative includes ground-water extraction, one of the two treatments discussed for the chromium, and discharge (all of these elements are described in the previous section). In addition, this alternative, called ultraviolet (UV)/Oxidation, includes a process that would chemically oxidize the organic compounds by using a combination of ultraviolet light, ozone and/or hydrogen peroxide.



Estimated Time to Implement:
18-21 months
Estimated Cost:
\$38,473,000 (using Option 1, Ion Exchange)

\$37,546,000 (using Option 2, Carbon Adsorption)

Ground-Water Alternative 3 - Extraction, Chromium Treatment, Air Stripping and Discharge

In addition to the already-described extraction, treatment for chromium and discharge, this option includes an air stripping treatment for the VOCs. In this process, the VOCs are converted to gases from the liquid state, thus removing them from the water. The emissions from this process will be treated to ensure that the gaseous

* GROUNDWATER EXTRACTION, TREATMENT AND DISCHARGE

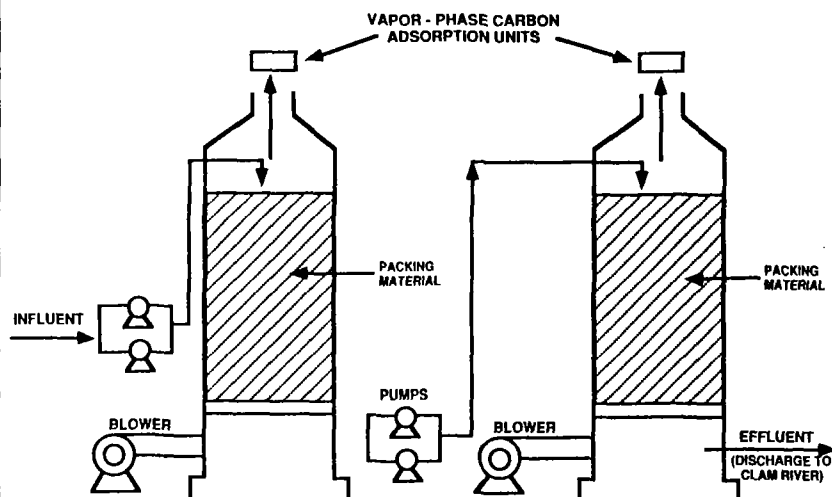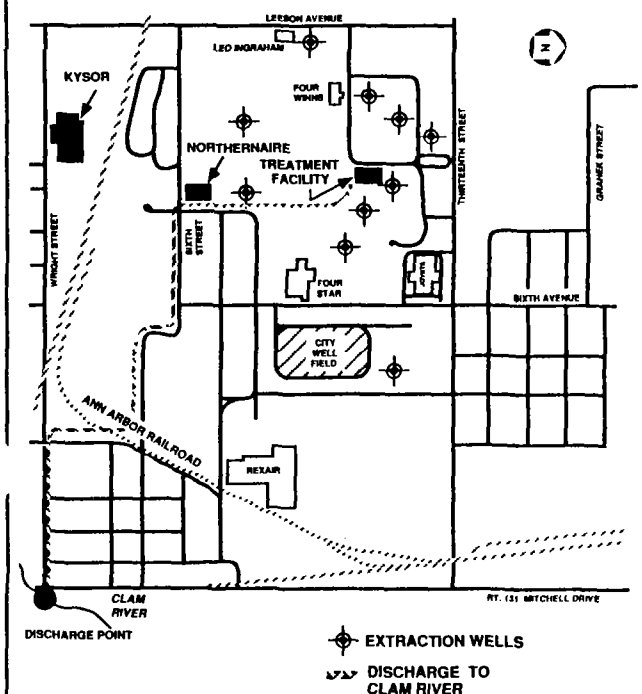

**FIGURE 1
GROUNDWATER ALTERNATIVE 3A
KYSOR/NORTHERNNAIRE SITES
CADILLAC, MICHIGAN**

* Design is conceptual only. Exact details will be determined during remedial design.

VOCs are not transmitted into the environment. One of two processes would be used to accomplish the air stripping:

3A) Air Stripping with Vapor-Phase Carbon Adsorption

Estimated Time to Complete:
18-21 months
Estimated Cost: \$16,051,000
(using Option 1)
\$15,124,000 (using Option 2)

3B) Air Stripping with Liquid-Phase and Vapor-Phase Carbon Adsorption

Estimated Time to Complete:
18-21 months
Estimated Cost: \$21,133,000
(using Option 1)
\$20,206,000 (using Option 2)

Ground-Water Alternative 4 - Steam Stripping

In addition to the elements included in all the ground-water alternatives, this alternative includes steam stripping to remove the VOC contamination. This treatment works on the same principle as the air stripping: the VOCs are forced out of the water and absorbed by the steam. This contaminated steam is condensed to a liquid and treated or disposed at an off-site licensed facility.

Estimated Time to Complete:
18-21 months
Estimated Cost: \$22,298,000
(using Option 1)
\$21,371,000 (using Option 2)

Soil Contamination Alternatives

A ROD was already signed to address contaminated soils at the Northernnaire

site and that cleanup is already under way; therefore, these alternatives apply exclusively to the soils at the Kysor site.

Soil Alternative 1 - No Action

This alternative involves no cleanup of soil contamination at the Kysor site. It only provides for site monitoring and future review, and seeking deed and land restrictions to prohibit certain uses of the land in order to protect public health.

Estimated Time to Complete: None
Estimated Cost: \$163,000

Soil Alternative 2 - Surface Capping and Subsurface Containment Wall

This alternative consists of constructing a slurry wall below the surface to contain the contaminated soils in place, and

installing a multilayer cap over the surface to prevent contact with the contaminated soils and to keep rainfall from seeping into the soils and carrying the contamination to the ground water.

Estimated Time to Complete:

24-30 months

Estimated Cost: \$1,175,000

Soil Alternative 3 - Excavation and Low-Temperature Thermal Stripping

Under this alternative, contaminated soils would be excavated and treated on-site by a low temperature thermal stripping process to remove the VOCs. The cleaned soils would then be tested and backfilled into the excavated area. Emissions from the process would be treated and tested.

Estimated Time to Complete:

24-27 months

Estimated Cost: \$8,600,000

Soil Alternative 4 - In-Situ Soil Flushing

The contaminated soils would be flushed with water, which would then carry the VOC contamination into the ground water. The contaminated ground water would be treated by one of the ground-water alternative treatments described previously.

Estimated Time to Complete:

27 months

Estimated Cost: \$225,000

Soil Alternative 5 - In-Situ Vacuum Extraction

This alternative involves extracting the contamination from the soils by means of a series of induction and extraction wells. A blower system would force clean air into the unsaturated zone (which simply means the dry soils that are above the water table) and soil pore spaces. This system forces the VOCs out of the soils into a gaseous form; the contaminated gases are then extracted by means of a vacuum system for treatment and testing before being released into the atmosphere.

Estimated Time to Complete:

21-27 months

Estimated Cost: \$925,000

Soil Alternative 6 - Soil Excavation and On-site Incineration

This alternative consists of excavating contaminated soils and incinerating them in an on-site mobile incinerator to destroy the VOC contamination. The ash resulting from this process would be disposed of on-site or in a licensed landfill.

Estimated Time to Complete:

25-27 months

Estimated Cost: \$14,300,000

EVALUATING THE ALTERNATIVES

The EPA has established nine criteria (see box on page 3) that are used on all

Superfund sites to evaluate the cleanup alternatives available. The criteria noted and defined in the inset range from institutional and cost considerations to the improvement of human health conditions. Based on these criteria, the agencies have recommended a course of action (see "Identification of EPA's Preferred Alternative" on page 5) to correct contamination at the sites. An analysis of the preferred alternative compared to the criteria is provided below. Pertinent information concerning other alternatives is also given.

Overall Protection Ground Water

Both technologies for treating the chromium contamination, Option 1 (Ion Exchange) and Option 2 (Carbon Adsorption) provide protection for public health and the environment. Both options ensure that potential risks from ingesting contaminated ground water would be eliminated by removing the chromium from the ground water. The major difference is that the ion exchange option produces over 200,000 gallons of hazardous waste annually requiring disposal, whereas carbon adsorption produces only approximately 15,000 pounds of spent carbon annually.

Ground-Water Alternative 3A, air stripping with carbon adsorption, is protective of human health and the environment by removing the contamination from the ground water. Additionally, this alternative does not generate hazardous waste requiring off-site disposal. Alternative 1 is not protective, and Alternatives 2, 3B and 4 all generate hazardous waste which must be disposed of in a licensed facility off-site.

Identification of EPA's Preferred Alternative

EPA has selected Alternative 3A, Extraction, Air Stripping with Vapor-Phase Carbon Adsorption, and Discharge, for ground-water contamination at both sites, and Alternative 5, In-Situ Vacuum Extraction, for soil contamination at the Kysor site. These combined actions being recommended include the following elements:

Deed restrictions would be sought to ensure that current and/or future landowners do not drill into the contaminated ground-water tables. These restrictions would also prevent building or excavating soils from the Kysor site to ensure there are no new releases of contamination from soils to the environment.

A fence would be constructed around the Kysor site to prevent trespassing.

A ground-water extraction and treatment system would be constructed, consisting of a number of extraction wells strategically located to intercept the contaminated ground water. An underground piping system will interconnect the extraction wells and carry the water to the on-site facility, where it will be treated to remove the chromium and VOC contamination.

A force main will be constructed to discharge the treated ground water to the Clam River.

An in-place vacuum extraction system will be installed on the Kysor site to remove the VOC contamination from the soils.

This recommended action for soils and ground water is estimated to cost approximately \$16 million and will take approximately one year to construct. EPA estimates that it will take 3-7 years after construction to fully treat the soils and 64 years for ground-water treatment. The final cleanup action chosen by the agencies after the conclusion of the public comment period will be the final cleanup plan for both sites.

Soils

Soil Alternative 5 provides protection of human health and the environment by minimizing VOC contamination in the soils. Alternative 1 provides no corrective action and thus is not protective, and Alternative 2 merely contains the contamination. Alternatives 3, 4 and 6 are protective.

Compliance with ARARs Ground Water and Soils

All alternatives for the ground water and soils, with the exception of Alternative 1, the No Action alternative, would comply with ARARs. Emissions resulting from the treatment process and the treated water to be discharged to the Clam River would require testing and controls to ensure compliance with all applicable regulations and health-based standards already established.

Long-Term Effectiveness Ground Water

Ground-Water Alternative 3A, as well as Alternatives 2, 3B and 4 provide long-term effectiveness and are permanent remedies. All of the alternatives involve long-term treatment of the ground water, requiring up to 64 years to complete. Alternative 1 provides no long-term effectiveness and is not a permanent remedy.

Soils

Alternative 5 provides a permanent long-term remedy equally effective as Alternative 4. Neither alternative requires long-term maintenance, although Alternative 4 requires limited monitoring to verify the effectiveness of a treatment. Alternative 1 does not provide long term protection, as VOCs would continue to leach to the ground water. Alternative 2 minimizes the amount of contaminants leaching into

the ground water, but does not ensure a permanent solution. Alternatives 3 and 6, which call for excavating contaminated soils, provide long-term effectiveness and permanence; however, due to the volatile nature of the VOCs in the soils, it is not essential to excavate the soils in order to correct the contamination.

Implementability Ground Water

Both of the options for treating the chromium in the ground water are readily implementable and would require approximately the same amount of time to accomplish.

All of the treatment alternatives, with the exception of the No Action alternative, are technically feasible and the necessary equipment is readily available. For each of these alternatives, it would be necessary to construct a treatment facility which would require approximately 18-21 months for design and construction. Alternative 1 would not require any implementation time or expense.

Soils

All alternatives would be readily implementable. Alternative 5 is particularly well-suited to the nature of the soil contamination and the existing hydrogeological conditions of the Kysor site. The sandy soils present are highly permeable, increasing the effectiveness of this alternative, design and installation of the necessary wells would be readily accomplished in 21-27 months.

Short-Term Effectiveness Ground Water

All alternatives can be implemented with equal short-term effectiveness. Each alternative, with the exception of

No Action, involve handling of hazardous waste materials by on-site personnel; however, the potential risks can be effectively mitigated by following normal health and safety procedures. Workers will wear protective clothing and will follow a health and safety plan for all site construction and monitoring activities.


Soils

Alternatives 3 through 6 involve some short-term risk to workers through skin contact or inhalation of dusts or vapors when drilling wells and/or excavating contaminated materials. However, these risks can be eliminated by using proper safety procedures and equipment. Alternative 1 poses no short-term risks.

Reduction of Toxicity, Mobility, or Volume Ground Water

All of the ground-water alternatives, with the exception of Alternative 1, reduce the toxicity, mobility and volume of the contamination in the ground water. The differences between the options are in the amounts of hazardous wastes generated by the treatment processes requiring off-site disposal.

Alternative 3A provides effective reduction without generating any hazardous materials requiring disposal. The carbon used in the treatment can be regenerated in place, whereas Alternative 3B would produce approximately 225,000 pounds annually of spent carbon, and Alternative 4 would generate approximately 84,000 gallons of condensed liquids containing VOCs, both of which would require off-site disposal.

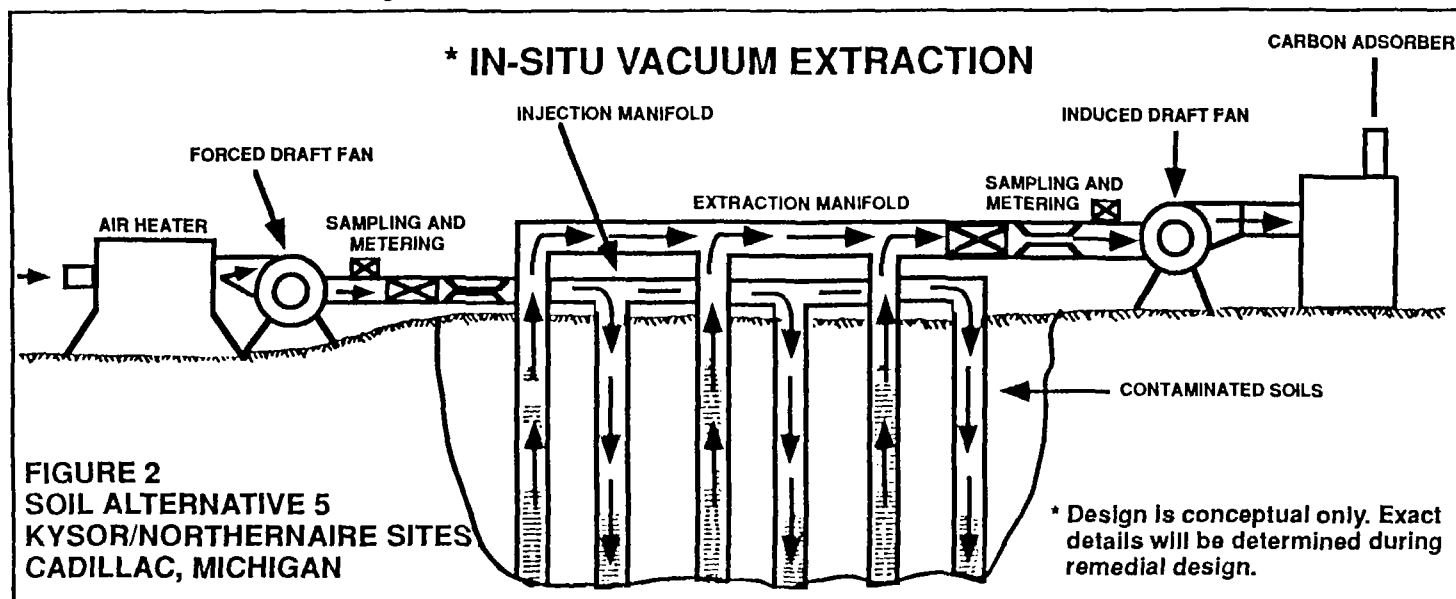

Soils

Alternative 5 reduces the toxicity, mobility and volume of the VOCs in the soils, as do Alternatives 3 and 6. Alternative 5 achieves the reduction without excavating and handling contaminated soils, as is required under Alternatives 3 and 6. Alternative 4 reduces the VOCs in the soils; however, it increases contamination in the ground water. Alternative 1 does not achieve any reduction, and Alternative 2 only reduces the mobility.

Cost

Ground Water and Soils

Estimated costs are detailed under each alternative. In its evaluation of the cost-effectiveness of a recommended remedy, EPA weighs the costs

of construction, implementation and monitoring against the other benefits of the alternative. Thus, the recommended alternative may not have the lowest cost associated with its implementation, but has been determined to be the most effective in relationship to the other elements. Ground-Water Alternative 3A and Soil Alternative 5 are considered by the agencies to be the most cost-effective alternatives.

State Acceptance

MDNR concurs with EPA on the selection of Alternative 3A for the ground-water contamination and Alternative 5 for the soils at Kysor as the preferred alternatives.

Community Acceptance

EPA is providing an opportunity for public comment concerning the preferred alternative and the other alternatives considered in the full-site feasibility study. These comments will be collected, evaluated, and fully considered in the final selection of a remedy.

In summary, EPA prefers Alternatives 3A and 5 because they provide the best balance of protectiveness, effectiveness, implementability and cost. EPA and MDNR believe the preferred alternative will meet the requirements of CERCLA to be protective, attain ARARs, be cost-effective, and use permanent solutions and alternative treatment technologies to the maximum extent practicable.

GLOSSARY

Adsorption The passage of one substance into or through another; e.g., an operation in which one or more soluble components of a gas mixture are dissolved in a liquid.

Chromium A heavy metal used in electroplating, in photography, and as a paint pigment. Acute ingestion of one form of chromium causes hemorrhages of the gastrointestinal tract. Airborne chromium has caused lung and other respiratory cancers in workers who were frequently exposed to it on the job.

Ground Water Water that fills the spaces between soil, sand, rock and gravel particles beneath the earth's surface. Precipitation, such as rain, reaches the ground and then slowly moves through the soil, sand, gravel and/or rock into small cracks and crevices beneath the ground surface.

During a process which can take many years, this filtered water eventually provides a water source which is naturally pure. This water may then be withdrawn by wells for use as drinking water.

National Priorities List (NPL) U.S. EPA's list of the top priority hazardous waste sites in the country. Sites on the NPL are eligible for federal cleanup money under Superfund.

Remedial Investigation/Feasibility Study (RI/FS) A Remedial Investigation (RI) examines the nature and extent of contamination problems at a site. The Feasibility Study (FS) evaluates different remedial alternatives for site cleanup and recommends the most cost-effective alternative.

Superfund A term commonly used

to describe the federal program established by the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) passed into law in 1980 and amended in 1986. It is administered by EPA to investigate and clean up actual or potential hazardous waste problems.

Volatile Organic Compounds (VOCs) A group of carbon-containing chemical compounds that have a tendency to evaporate when exposed to air. Because of this tendency, VOCs disappear more rapidly from surface water than from ground water. Since ground water does not usually come into contact with air, VOCs are not easily released and can be present in drinking water obtained from wells. VOCs may pose a threat to human health. Some VOCs are believed to cause cancer in humans.

MAILING LIST ADDITIONS AND CORRECTIONS

To be placed on the site mailing list for information regarding the Northernair and Kysor Superfund sites, or to make corrections to your address, please fill out and mail this form to:

Dan O'Riordan
Community Relations Coordinator
U.S. EPA Office of Public Affairs (5PA-14)
230 S. Dearborn
Chicago, IL 60604

Name: _____

Address: _____

Telephone: _____

Affiliation: _____

OPPORTUNITIES FOR PUBLIC INVOLVEMENT

The Proposed Plan for the Kysor and Northernnaire sites is meant to provide interested parties with a summary of the RI and the remedial alternatives analyzed in the FS and the rationale for selecting the preferred alternative for the site. The EPA encourages the public to provide comments on all the alternatives discussed, not just on the preferred alternative. For a thorough review, the public should also make use of the RI/FS and other pertinent documents, as they give a more complete description of the investigation and the alternatives contemplated for the Kysor and Northernnaire sites. EPA encourages interested individuals to review the documents used by the agencies to reach their recommendation. These documents are located in the site repository at:

Cadillac-Wexford County Library 411 South Lake Street Cadillac, Michigan

The public is encouraged to attend a public meeting at the **Wexford County Courthouse, August 7, 1989** to discuss the proposed remedial alternative for the Kysor and Northernnaire sites. Representatives from EPA and MDNR will be able to answer questions and oral comments will be accepted during the public meeting. A transcript of the meeting will be made and entered into the files at the repository listed above.

Public comments are an important part of selecting a final remedial action for the site. Therefore, written and verbal comments will be accepted from July 27 to August 28, 1989, and will be addressed in the Responsiveness Summary portion of the Records of Decision

(ROD). The final selection of the remedial alternative for the Kysor and Northernnaire sites will not be made until after the public comment period has concluded. Your comments are encouraged and should be directed to:

Dan O'Riordan, 5PA-14
Community Relations Coordinator
U.S. EPA Office of Public Affairs
(312) 886-4359

Steven Sanders, 5HS-II
Remedial Project Manager
U.S. EPA Emergency and
Remedial Response Branch
(312) 886-1434

U.S. EPA - Region 5
230 South Dearborn Street
Chicago, Illinois 60604
Toll Free Number: 1-800-621-8431
8:30 a.m. to 4:30 p.m. Central Time



**U. S. Environmental Protection Agency
Region 5
Office of Public Affairs (5PA-14)
230 South Dearborn Street
Chicago, IL 60604**